

MAN915C103

Chip Antenna

MECSINE 兆讯

Chip Antenna

For RFID

MAN915C103

10x3.2x0.6 mm

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com may contain us for future information
Feb. 03, 2024

MAN915C103

Chip Antenna



Applications

1. 915MHz device
2. RFID gadget
3. ISM band equipment

Features

1. Compact size
2. Omni-directional radiation
3. Tape & reel automatic mounting
4. RoHS compliance (Pb-Free)

Description

The antenna is designed for superior performance, and can be widely used for wireless applications. We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

Electrical Specification

Table 1. MAN915C103 Electrical Specification

Item	Min.	Type	Max.	Unit
Frequency Range	900		930	MHz
Efficiency		63		%
Peak Gain		3.56		dBi
Polarization		Linear		
Nominal Impedance		50		Ω

- Ta: +25±5°C


Mechanical Specification

Table 2. MAN915C103 Mechanical Specification

Item	Min.	Type	Max.	Unit
Antenna Size		10*3.2*0.6		Mm
Temperature	-40		+85	°C
Operating temperature	-40		+85	°C

Outline Drawing

Figure 1. MAN915C103 View (Unit: mm)

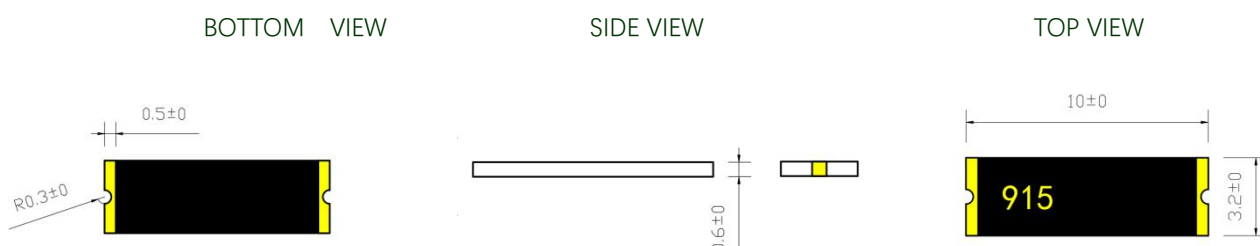

All Use For RF & Microwave


MAN915C103

Chip Antenna

MEGSINE 兆讯

Recommend PCB Layout

Figure 2. MAN915C103 PCB Layout (Unit: mm)

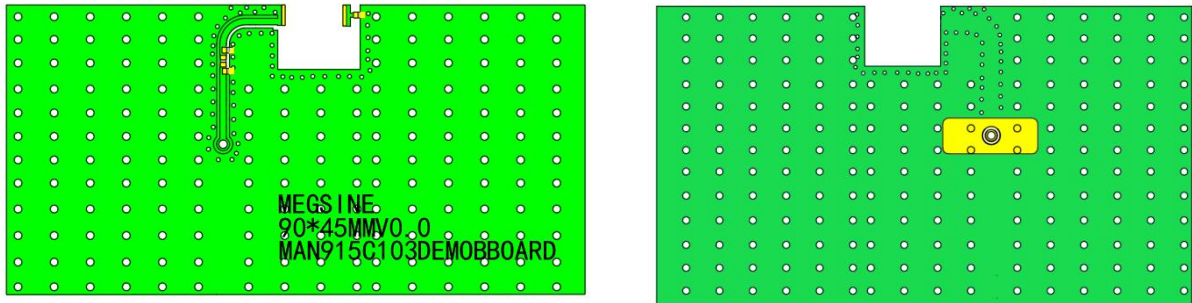

Size90*45mm

Figure 3. MAN915C103 Antenna Layout (Unit: mm)


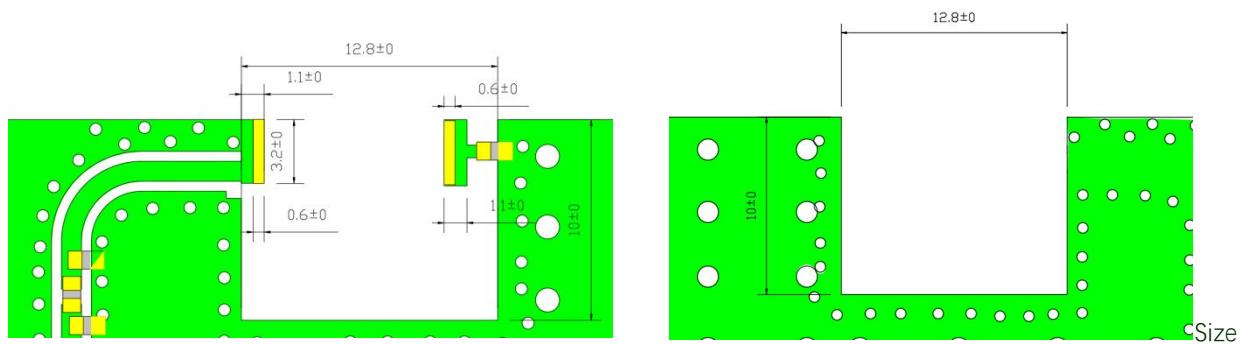


Figure 4. MAN915C103 Foot Print (Unit: mm)

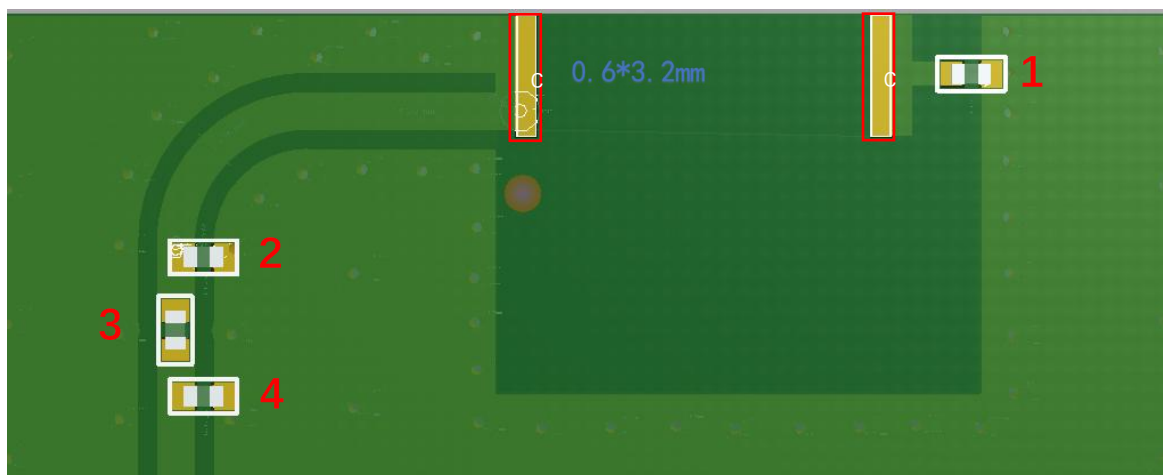

All Use For RF & Microwave

MAN915C103

Chip Antenna

MECSINE 兆讯


Table 3. MAN915C103 Matching

Location	Description	Vendor
1	11pf	MURATA
2	7pf	MURATA
3	9.1nh	MURATA
4	N/C	/

*Antenna ground should not be less than 50*30mm

Typical Performance

Figure 5. MAN915C103 VSWR

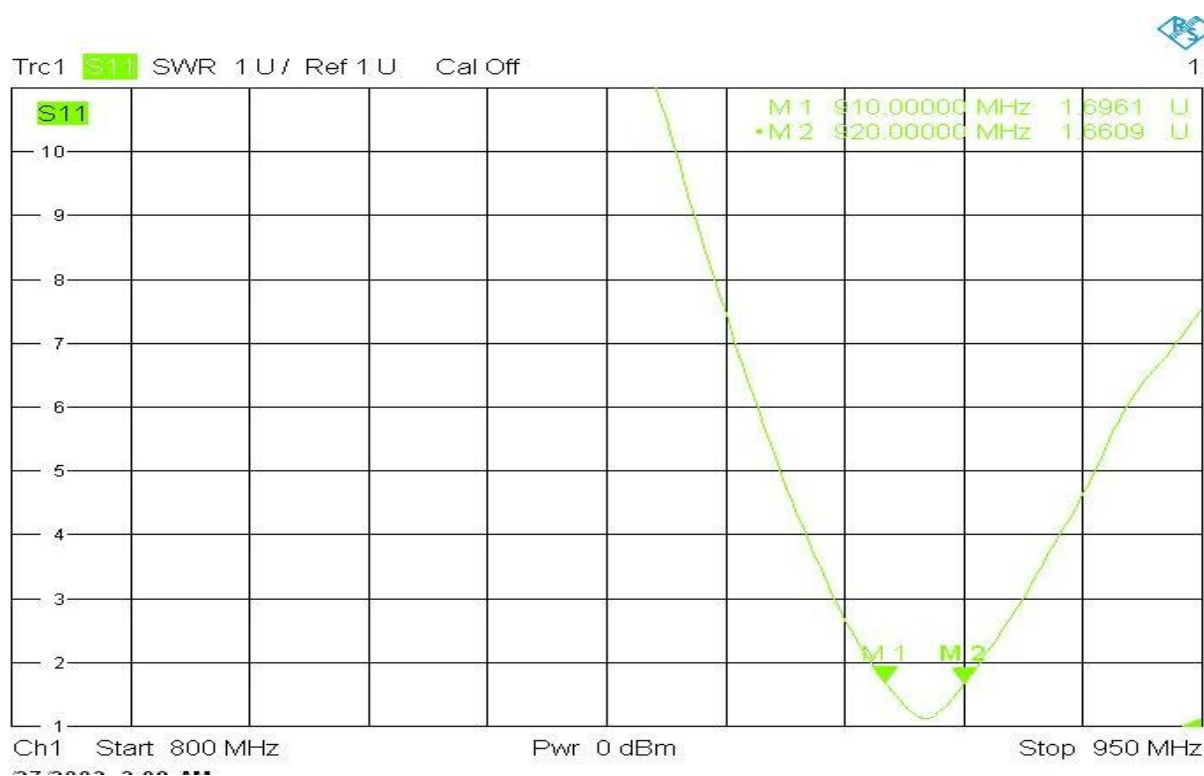


All Use For RF & Microwave

MAN915C103

Chip Antenna


MECSINE 兆讯

Figure 6. MAN915C103 Return Loss

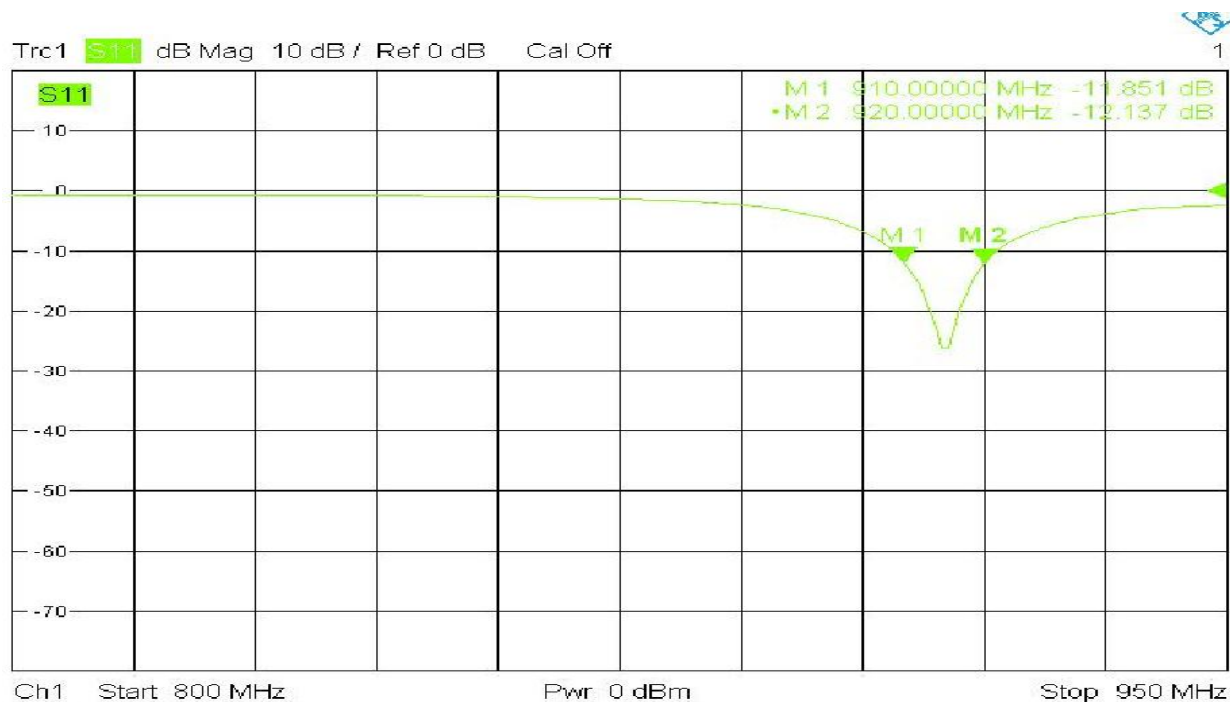

Radiation Pattern & Efficiency & Peak Gain

Figure 7. The Gain pattern is measured in FAR-field chamber

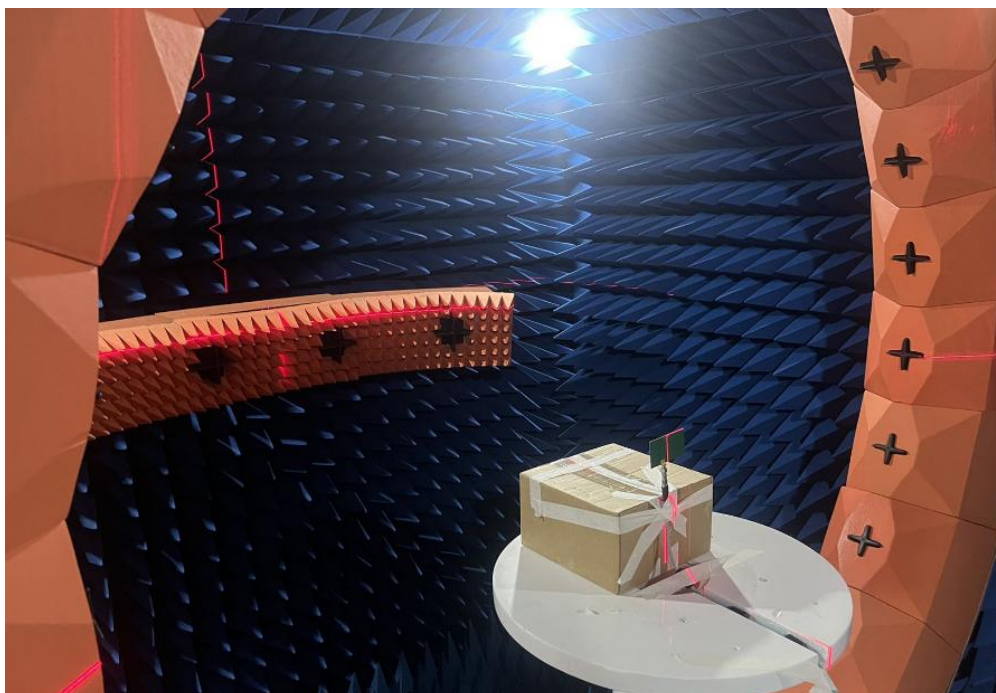


All Use For RF & Microwave

Table 4. MAN915C103 Total Efficiency&Peak Gain

Item (MHz)	Efficiency (%)	Peak Gain (dBi)	Avg gain (dB)	Item (MHz)	Efficiency (%)	Peak Gain (dBi)	Avg gain (dB)
900	39	1.22	-4.04	916	58	3.03	-2.36
901	43	1.67	-3.68	917	55	2.67	-2.61
902	47	2.16	-3.28	918	52	2.36	-2.82
903	51	2.64	-2.92	919	51	2.17	-2.96
904	54	2.96	-2.66	920	50	2.11	-2.99
905	56	3.08	-2.53	921	51	2.12	-2.94
906	56	3.04	-2.50	922	51	2.14	-2.89
907	56	2.94	-2.54	923	51	2.05	-2.91
908	55	2.86	-2.58	924	50	1.79	-3.05
909	55	2.88	-2.56	925	47	1.38	-3.29
910	57	3.02	-2.47	926	43	0.91	-3.62
911	59	3.20	-2.33	927	40	0.47	-3.93
912	61	3.42	-2.17	928	38	0.14	-4.18
913	62	3.56	-2.05	929	37	-0.03	-4.31
914	63	3.54	-2.04	930	37	-0.06	-4.33
915	61	3.35	-2.15				

*Antenna performance will also change in different environments, it is recommended to consult the relevant technical personnel before use to confirm the layout to ensure good performance.

Figure 8. MAN915C103 Total Efficiency

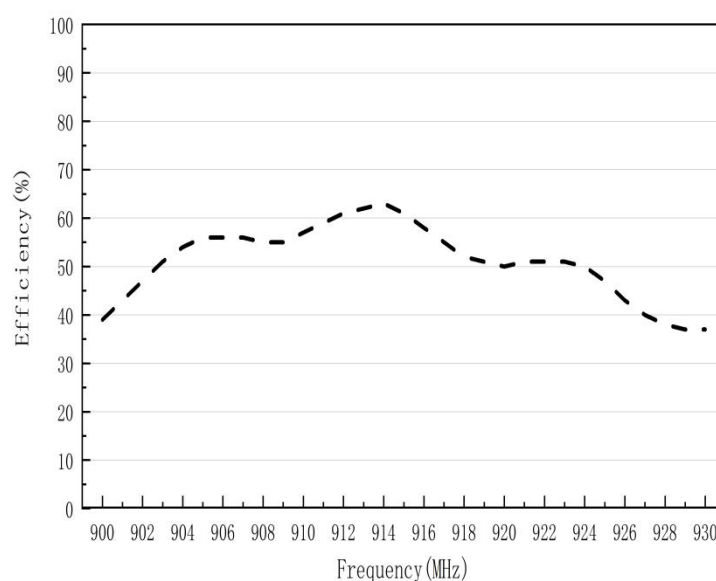

MAN915C103

Chip Antenna

MECSINE 兆讯

Figure 9. MAN915C103 Total Efficiency


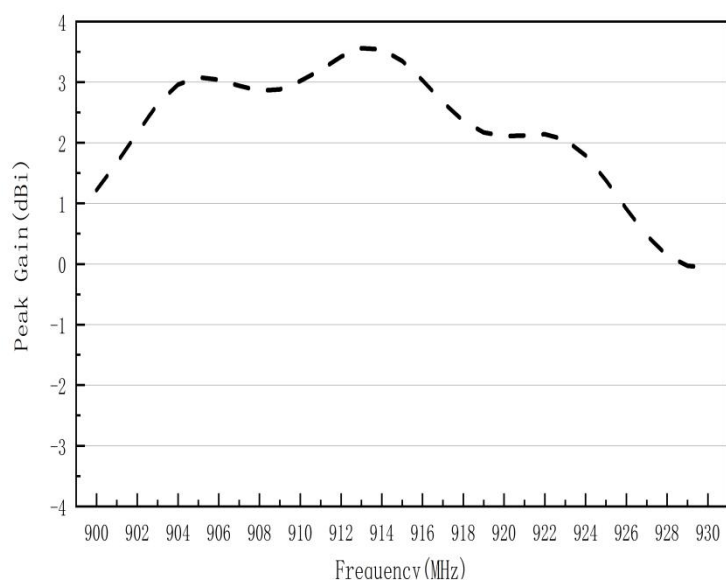


Figure 10. Radiation Pattern

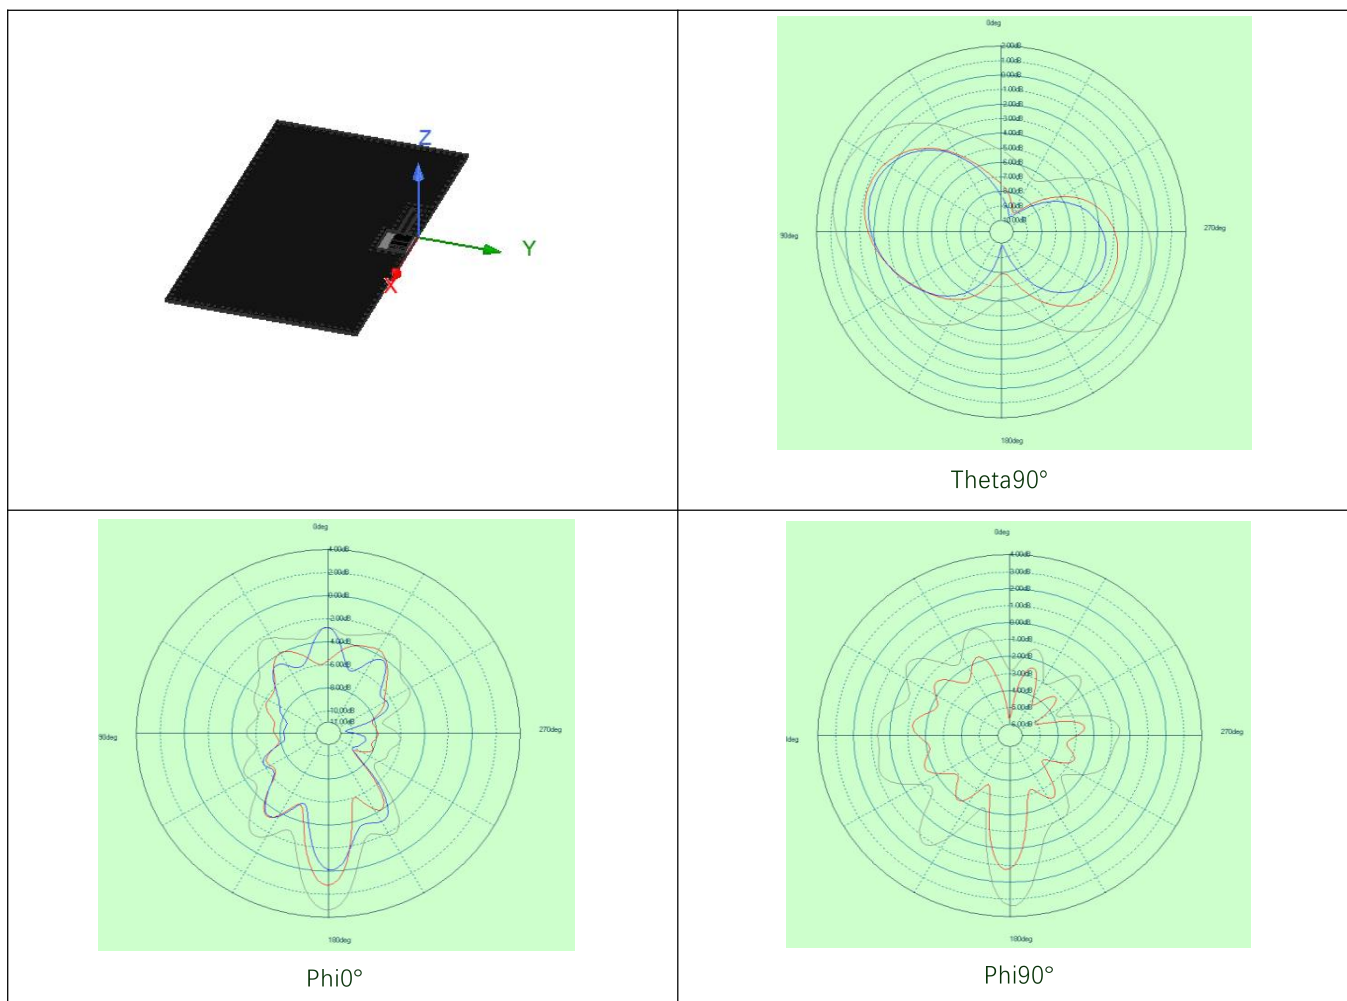

All Use For RF & Microwave


MAN915C103

Chip Antenna

MECSINE兆讯

Packaging and Ordering Information

Figure 11. Packaging Information

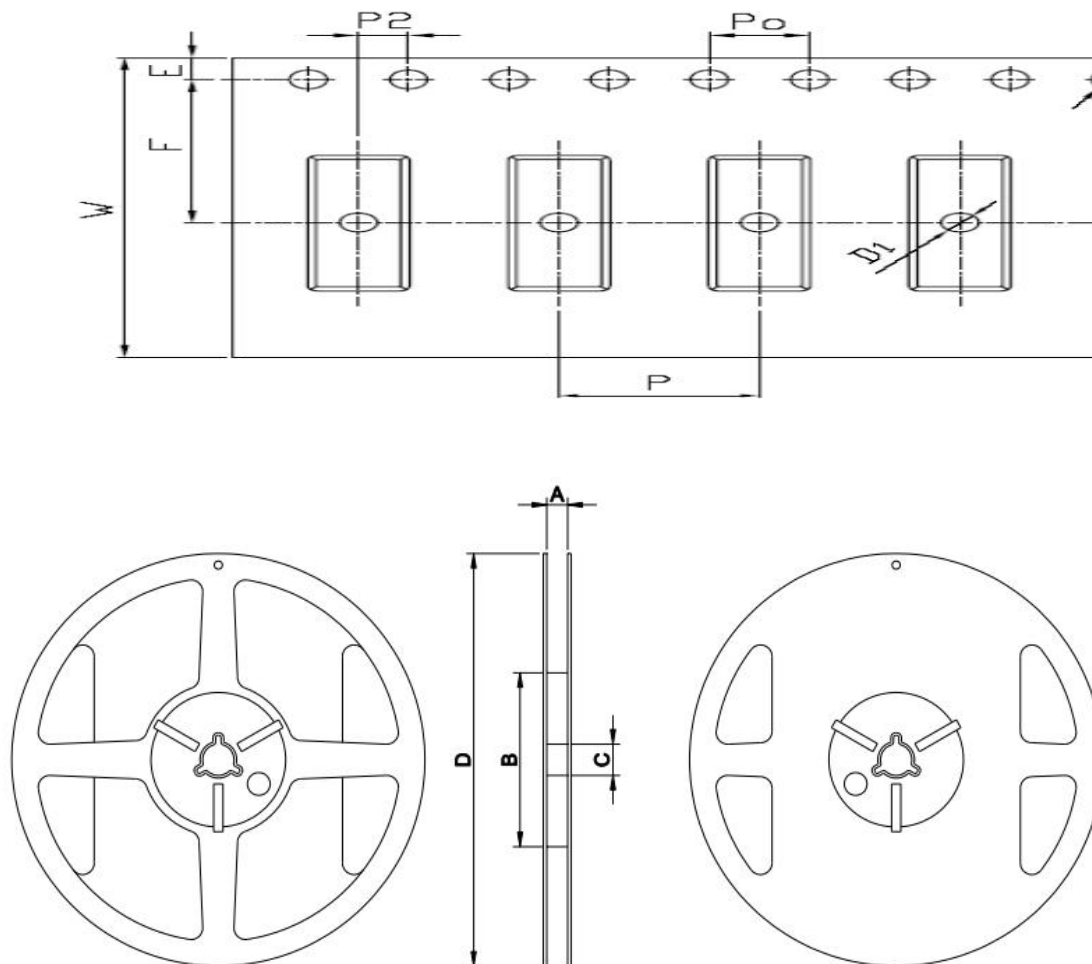

Feature	Specification & Tolerances
W	24.00 $\pm$ 0.30
P	8.00 $\pm$ 0.10
E	1.75 $\pm$ 0.10
F	11.50 $\pm$ 0.10
P2	2.00 $\pm$ 0.10
D1	1.50 $\pm$ 0.10
P0	4.00 $\pm$ 0.10
A	29.80 $\pm$ 0.10
B	99.00 $\pm$ 0.10
C	15.00 $\pm$ 0.10
D	330.00 $\pm$ 0.10

All Use For RF & Microwave

MAN915C103

Chip Antenna



Table 5. Packaging and Shipping

Device	Packaging	Reel	Shipping
MAN915C103	SMD	13"	5000/Reel

Revision	Description	Date
Rev0	Preliminary	2023/6/7
Rev1	formality	2023/7/4

All Use For RF & Microwave