

MAN3080C86

UWB Chip Antenna

MECSINE 兆赫斯

Chip Antenna

For UWB

MAN3080C86

8x6x1.2mm

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com may contain us for future information
Feb. 03, 2024

MAN3080C86

UWB Chip Antenna



Applications

1. 3-8 GHz device
2. Ch5&CH9 gadget
3. ISM band equipment
4. Small size



Features

1. Compact size
2. Omni-directional radiation
3. Tape & reel automatic mounting
4. Reflow process compatible
5. RoHS compliance (Pb-Free)

Description

The antenna is designed for superior performance, and can be widely used for wireless applications. We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

Electrical Specification

Table 1. MAN3080C86 Electrical Specification

Item	Min.	Type	Max.	Unit
Frequency Range	3000		8500	MHz
Efficiency	43		80	%
Peak Gain		2.82		dBi
Polarization		Linear		
Nominal Impedance		50		Ω

- Ta: +25±5°C

Mechanical Specification

Table 2. MAN3080C86 Mechanical Specification

Item	Min.	Type	Max.	Unit
Antenna Size		8.0*6.0*1.2		Mm
Temperature	-40		+85	°C
Operating temperature	-40		+85	°C

All Use For RF & Microwave


MAN3080C86

UWB Chip Antenna

MECSINE 兆讯

Outline Drawing


Figure 1. MAN3080C86 View (Unit: mm)

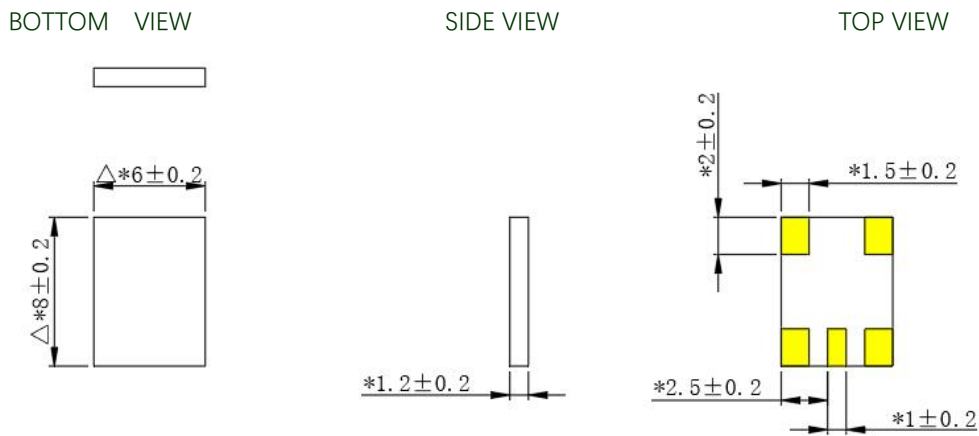

Recommend PCB Layout

Figure 2. MAN3080C86 PCB Layout (Unit: mm)

TOP&BOTTOM VIEW:

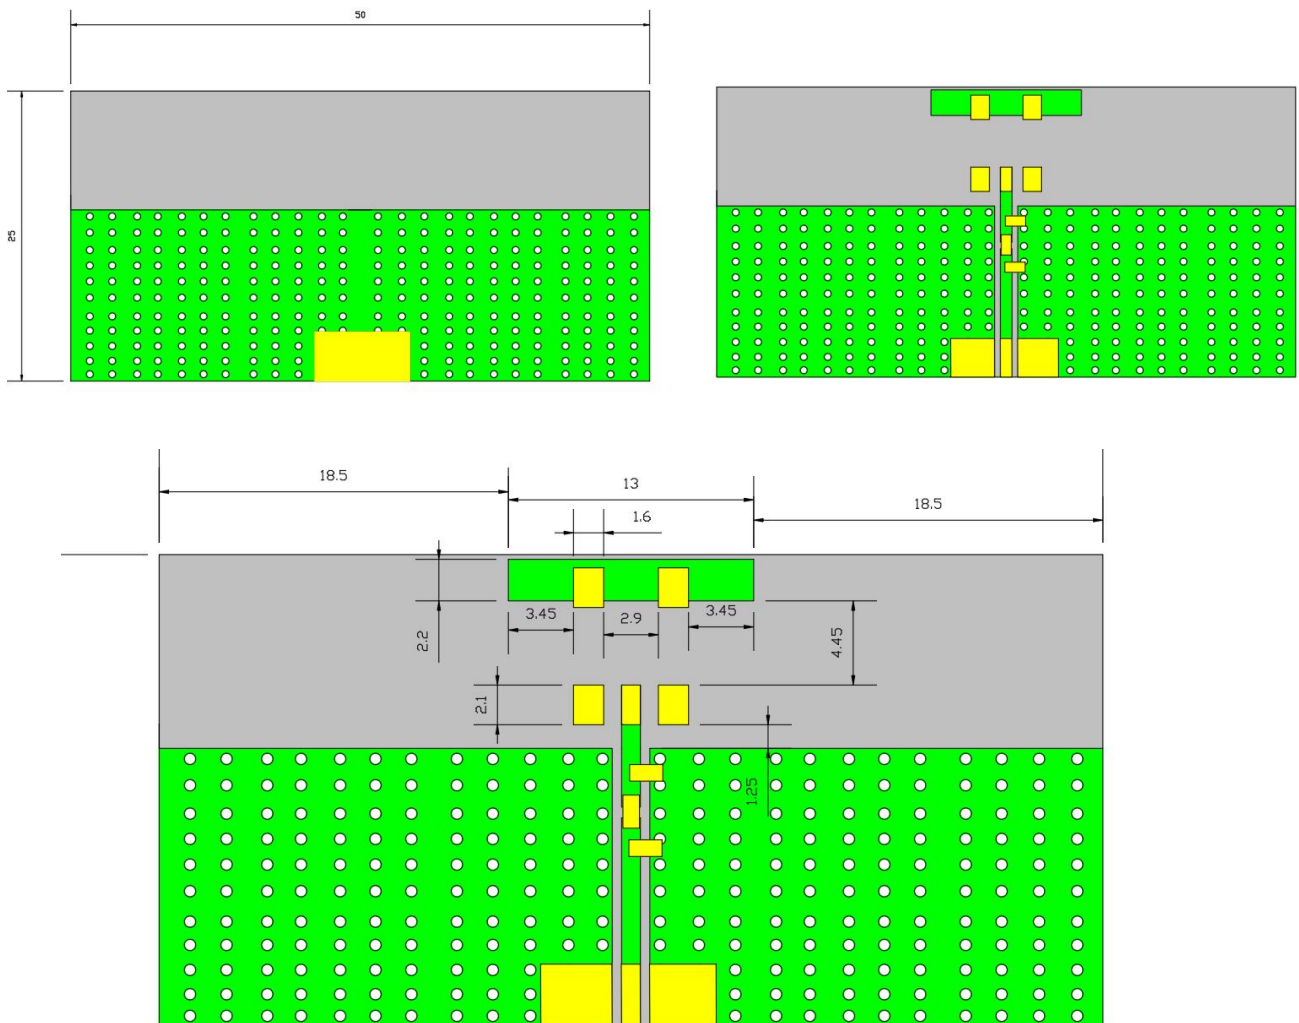


All Use For RF & Microwave

MAN3080C86

UWB Chip Antenna


MECSINE 兆讯

Figure 3. MAN3080C86 Antenna Layout (Unit: mm)

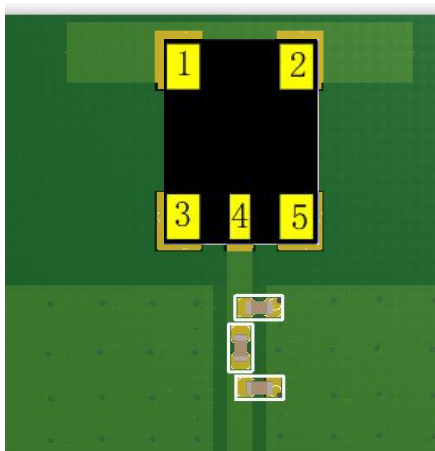

1	Pad
2	Pad
3	Pad
4	Feed
5	Pad


Figure 4. MAN3080C86 Matching Circuit (Unit: mm)

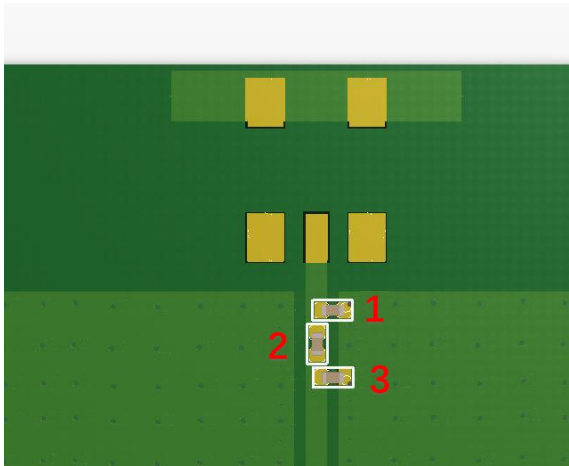

Location	Description	Vendor
1	4.3nH	MURATA
2	0Ω	MURATA
3	N/C	N/C

Typical Performance

Figure 5. MAN3080C86 VSWR

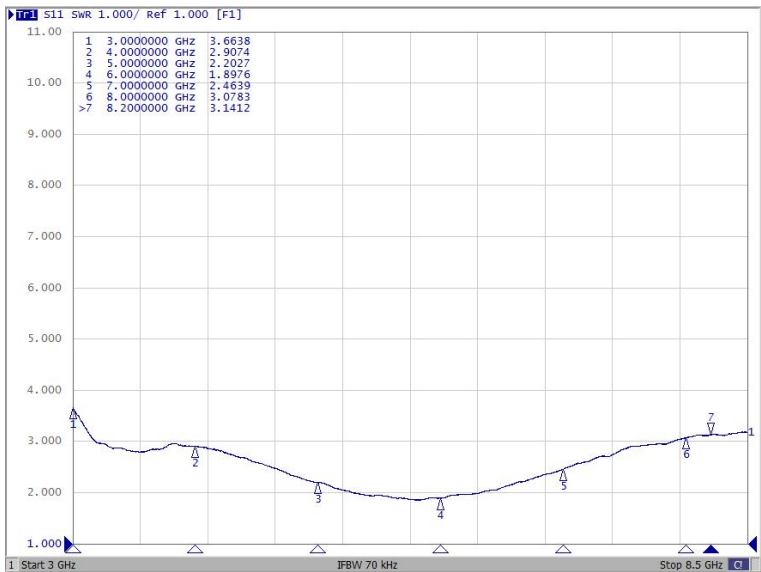

MAN3080C86

UWB Chip Antenna

MECSINE 兆讯

Radiation Pattern & Efficiency & Peak Gain

Figure 6. The Gain pattern is measured in FAR-field chamber

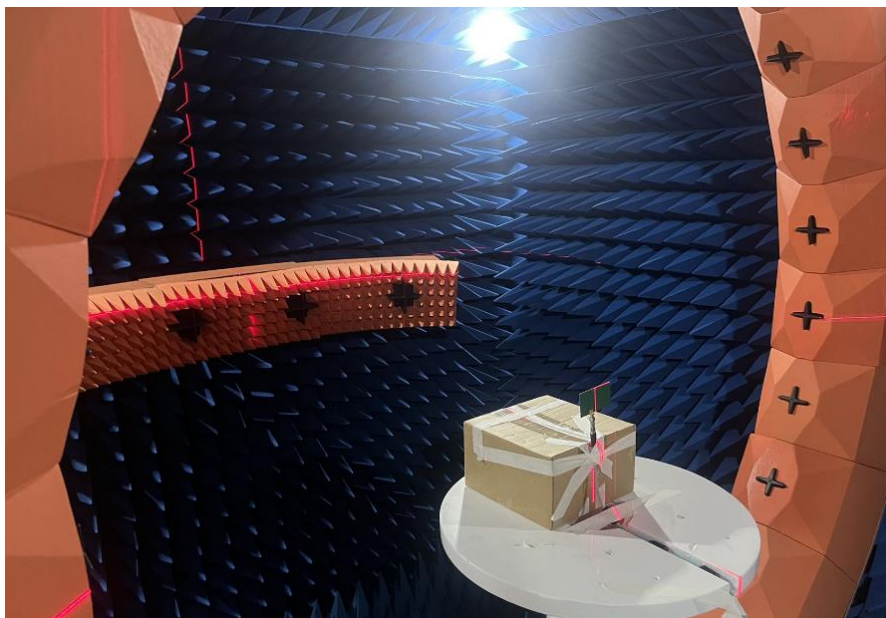


Table 3. MAN3080C86 Total Efficiency&Peak Gain

Item (MHz)	Efficiency (%)	Peak Gain (dBi)
3000	43.21	0.45
3500	58.87	1.65
4000	53.1	1.82
4500	58.55	2.35
5000	64.13	1.58
5500	71.85	2.49
6000	78.1	2.82
6500	72.04	2.55
7000	64.13	1.81
7500	60.63	0.96
8000	52.81	1.34
8500	45.14	0.73

All Use For RF & Microwave

MAN3080C86

UWB Chip Antenna

MECSINE 兆讯

Figure 7. MAN3080C86 Total Efficiency


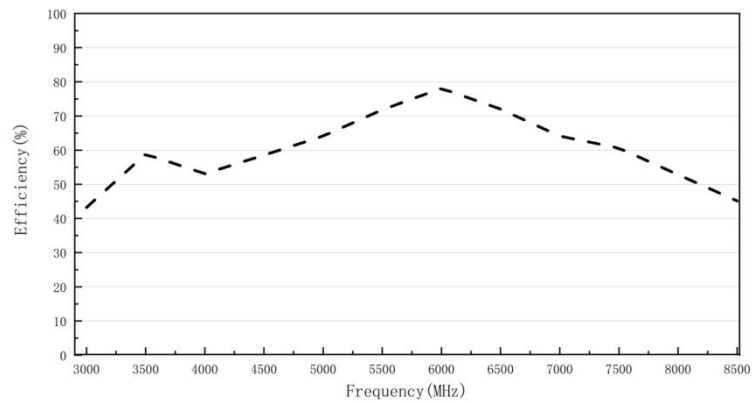


Figure 8. MAN3080C86 Peak Gain

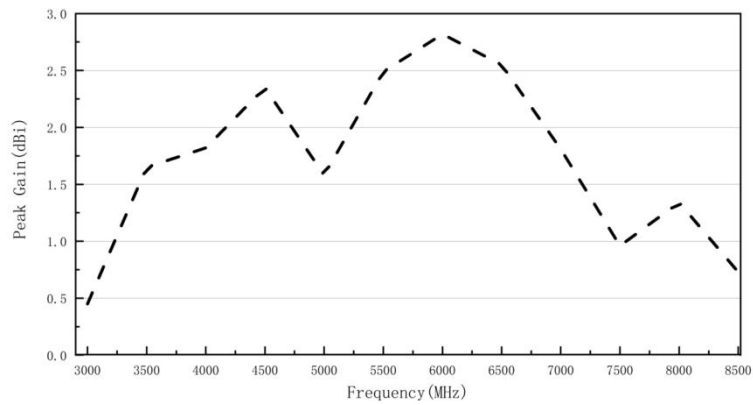


*Antenna performance will also change in different environments, it is recommended to consult the relevant technical personnel before use to confirm the layout to ensure good performance.

MAN3080C86

UWB Chip Antenna

MECSINE 兆讯

Packaging and Ordering Information

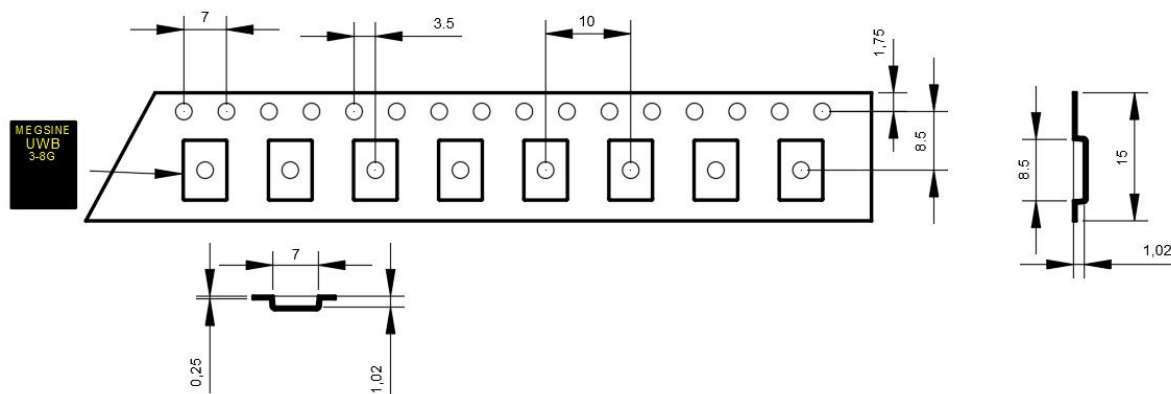

Reel Specifications

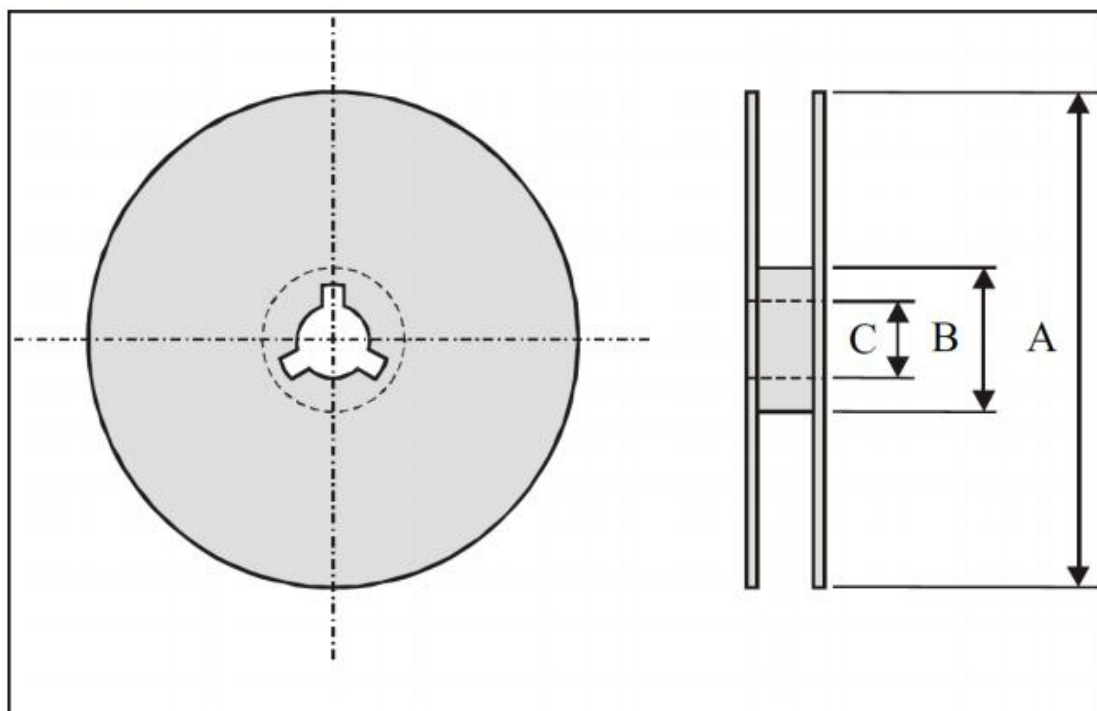


Table 5. Packaging and Shipping

Device	Packaging	Reel	Shipping
MAN3080C86	SMD	7"	1000/Reel

All Use For RF & Microwave

MAN3080C86

UWB Chip Antenna



Revision	Description	Date
Rev0	Preliminary	2023/11/8
Rev1	Preliminary	2025/4/11
Rev2	Supplementary test data	2025/9/23

All Use For RF & Microwave