

MAN2450L52

2.4 GHz Chip Antenna

MECSINE 兆讯

2.4 GHz Chip Antenna
For WiFi and Bluetooth

MAN2450L52

5x2x1 mm

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com


MAN2450L52

2.4 GHz Chip Antenna

MECSINE 兆讯

Applications

1. 2.4 GHz WiFi device
2. Bluetooth gadget
3. Zigbee device
4. ISM band equipment



Features

1. Compact size
2. Omni-directional radiation
3. Tape & reel automatic mounting
4. Reflow process compatible
5. RoHS compliance (Pb-Free)

Description

The antenna is designed for superior performance, and can be widely used for wireless applications. We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

Electrical Specification

Table 1. MAN2450L52 Electrical Specification

Item	Min.	Type	Max.	Unit
Frequency Range	2400		2500	MHz
VSWR	1.2		1.5	
Efficiency	54		57	%
Peak Gain	0.68		1.59	dBi
Polarization		Linear		
Nominal Impedance		50		Ω

• Ta: +25±5°C

Mechanical Specification

Table 2. MAN2450L52 Mechanical Specification

Item	Min.	Type	Max.	Unit
Antenna Size		5*2* 1		Mm
Storage Temperature	-40		+125	°C
Operating temperature	-40		+125	°C

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com


MAN2450L52

2.4 GHz Chip Antenna

MEGSINE 兆讯


Outline Drawing

Figure 1. MAN2450L52 View (Unit: mm)

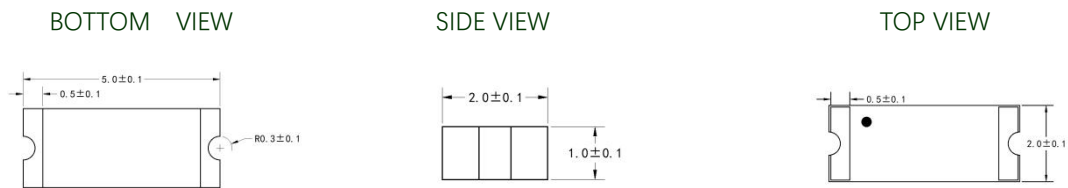


Recommend PCB Layout

Figure 2. MAN2450L52 PCB Layout (Unit: mm)

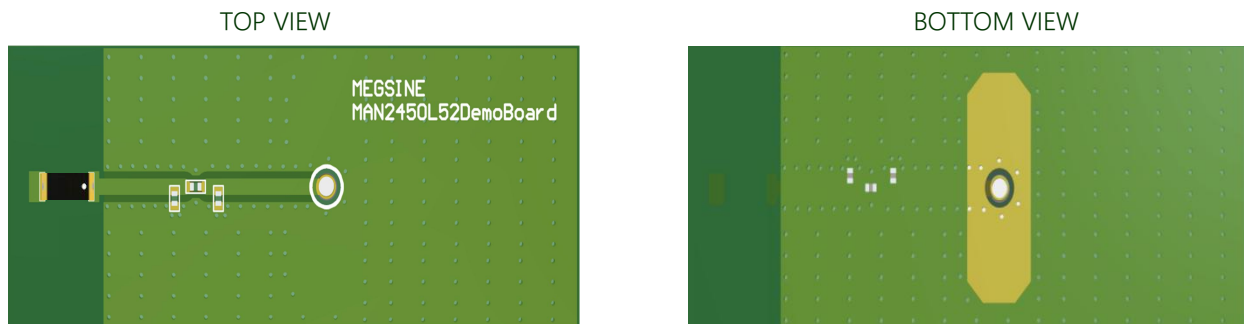

Size 53*20mm

Figure 3. MAN2450L52 Antenna Layout (Unit: mm)

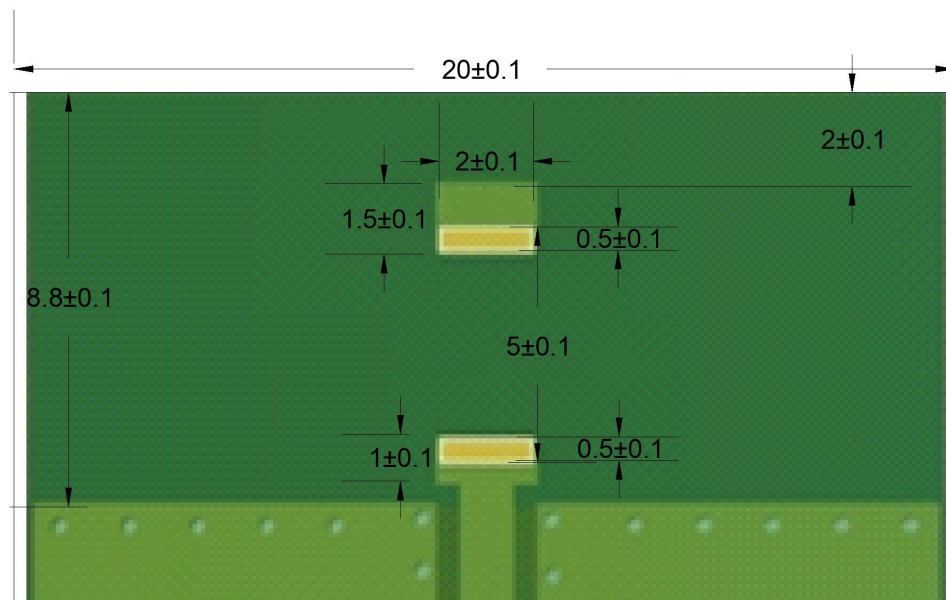

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN2450L52

2.4 GHz Chip Antenna

MECSINE 兆讯

Figure 4. MAN2450L52 Matching Circuit (Unit: mm)


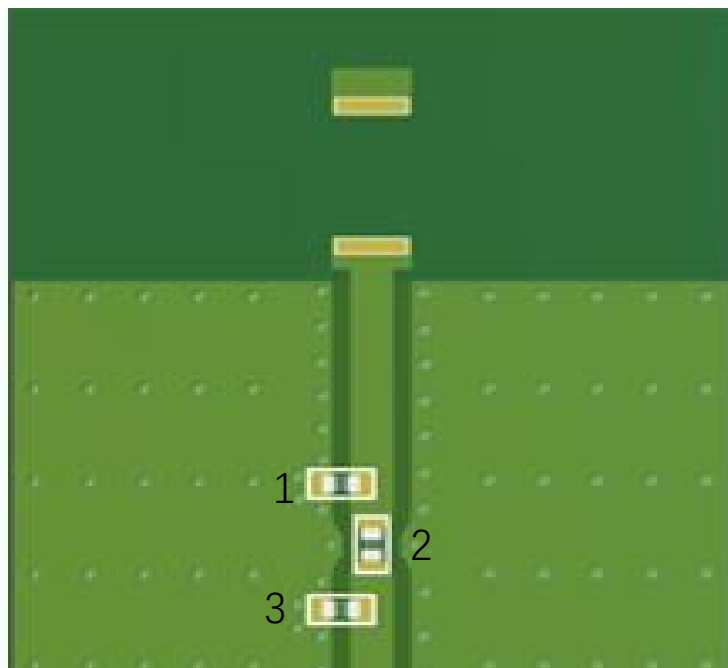


Table 3. MAN2450L52 Matching

Location	Description	Vendor
1	N/C	N/C
2	0Ω	MURATA
3	N/C	N/C

Typical Performance

Figure 5. MAN2450L52 VSWR

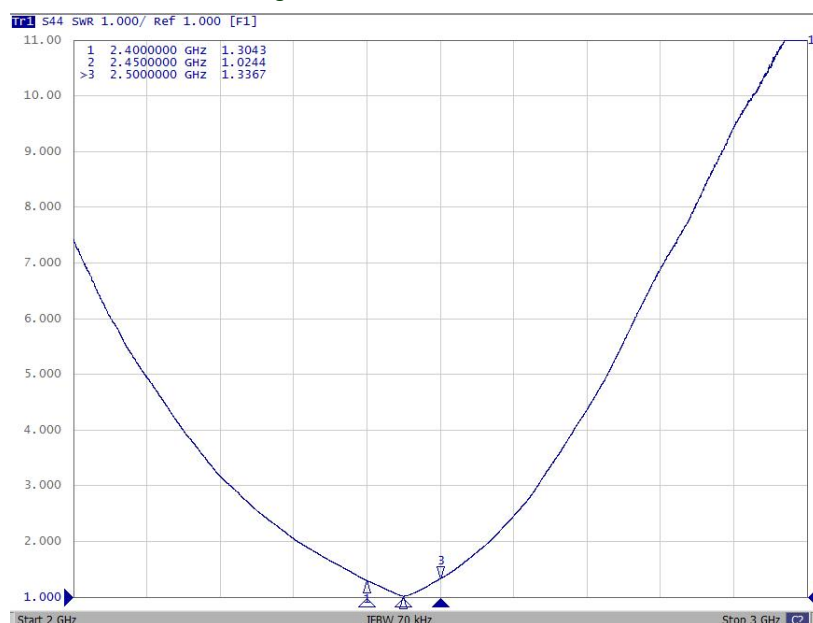


All Use For RF & Microwave

MAN2450L52

2.4 GHz Chip Antenna


MECSINE 兆讯

Figure 6. MAN2450L52 Return Loss

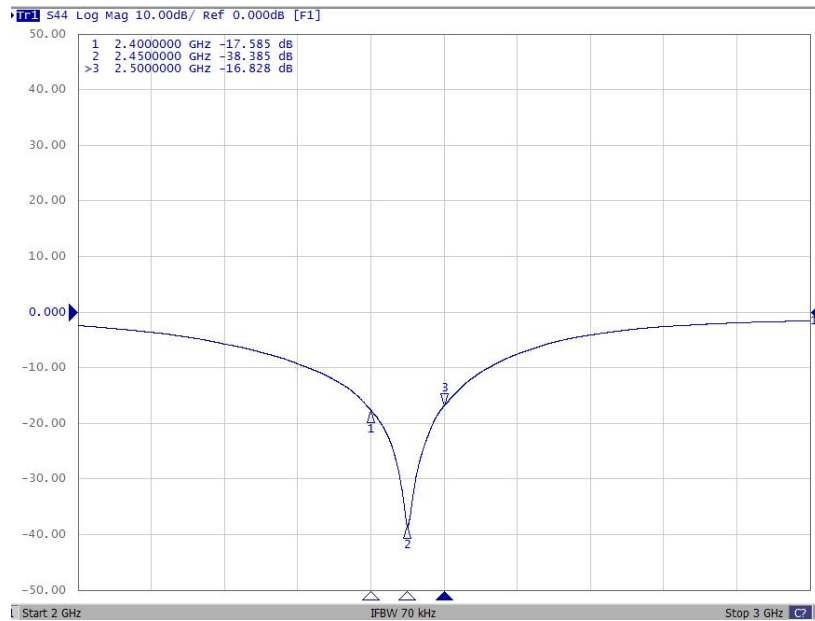

Radiation Pattern & Efficiency & Peak Gain

Figure 7. The Gain pattern is measured in FAR-field chamber

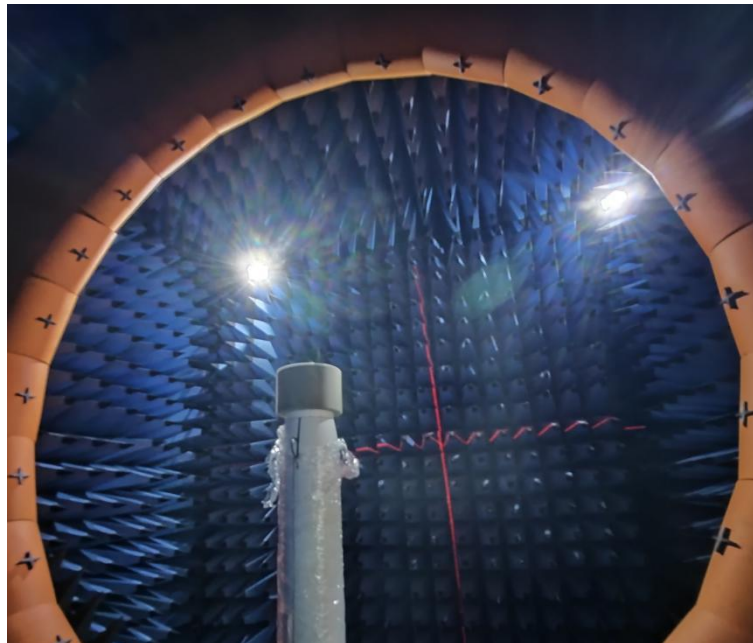

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN2450L52


2.4 GHz Chip Antenna

MECSINE 兆讯

Table 4. MAN2450L52 Total Efficiency&Peak Gain

Item (MHz)	Efficiency (%)	Peak Gain (dBi)
2400	55.61	0.86
2410	56.10	0.83
2420	55.52	0.75
2430	55.85	0.80
2440	54.92	0.68
2450	55.55	0.94
2460	56.49	1.13
2470	55.12	1.03
2480	56.30	1.30
2490	56.97	1.44
2500	57.37	1.59

Figure 8. MAN2450L52 Total Efficiency

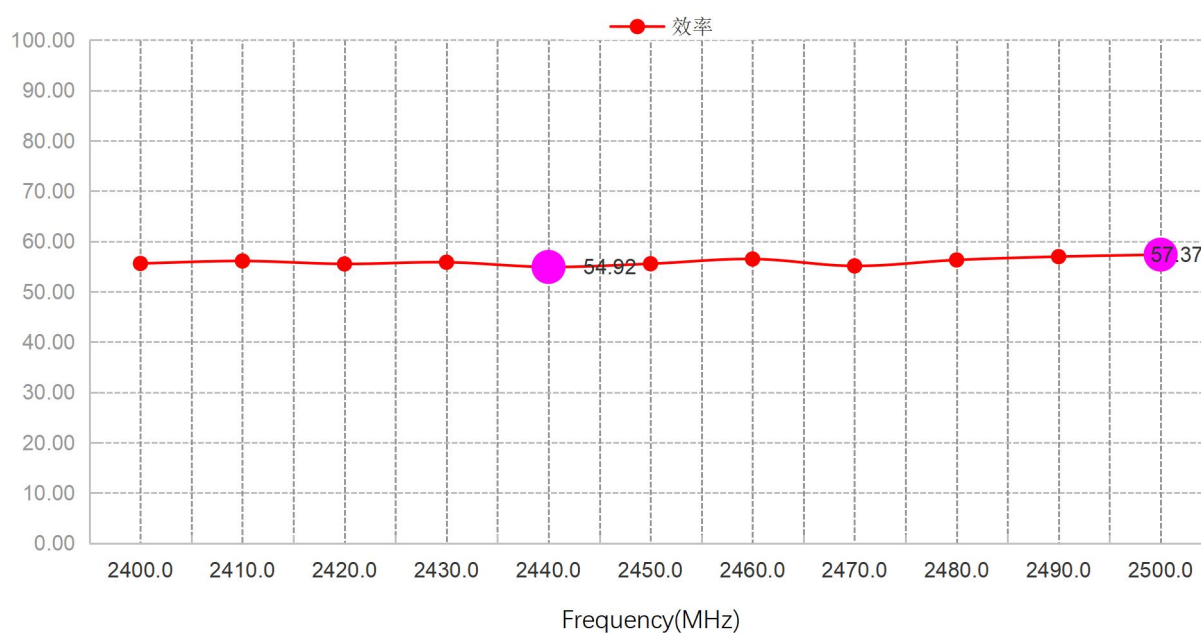

MAN2450L52

2.4 GHz Chip Antenna

MECSINE 兆讯

Figure 9. MAN2450L52 Peak Gain


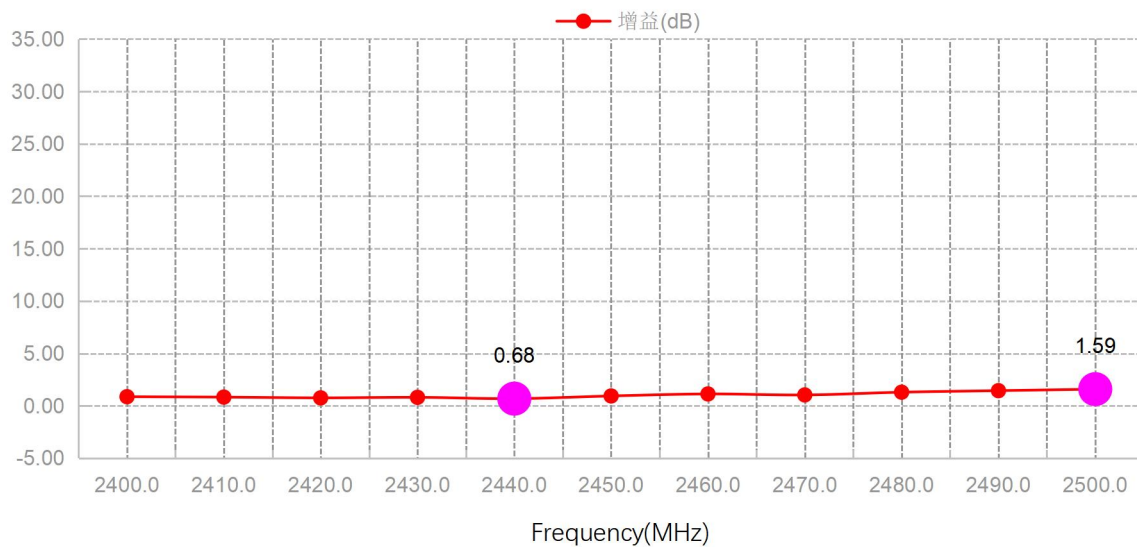


Figure 10. Radiation Pattern

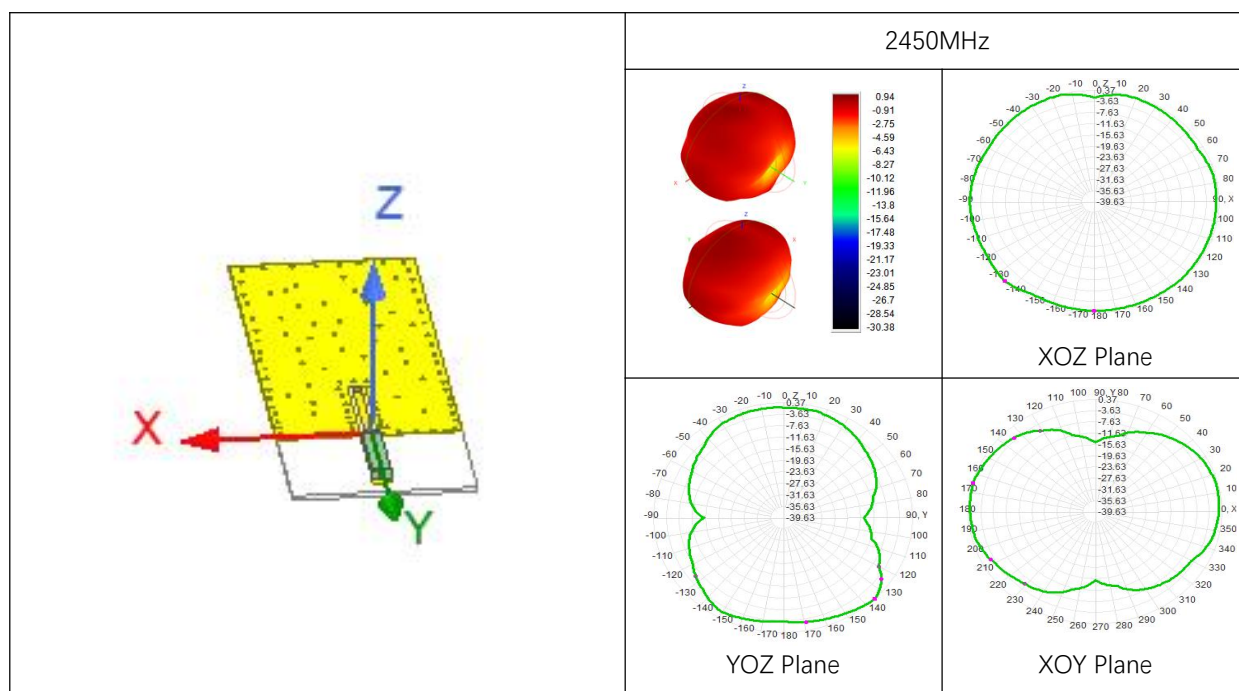

*Antenna performance will also change in different environments, it is recommended to consult the relevant technical personnel before use to confirm the layout to ensure good performance.

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN2450L52

2.4 GHz Chip Antenna

MECSINE兆讯

Packaging and Ordering Information

Figure 11. Packaging Information

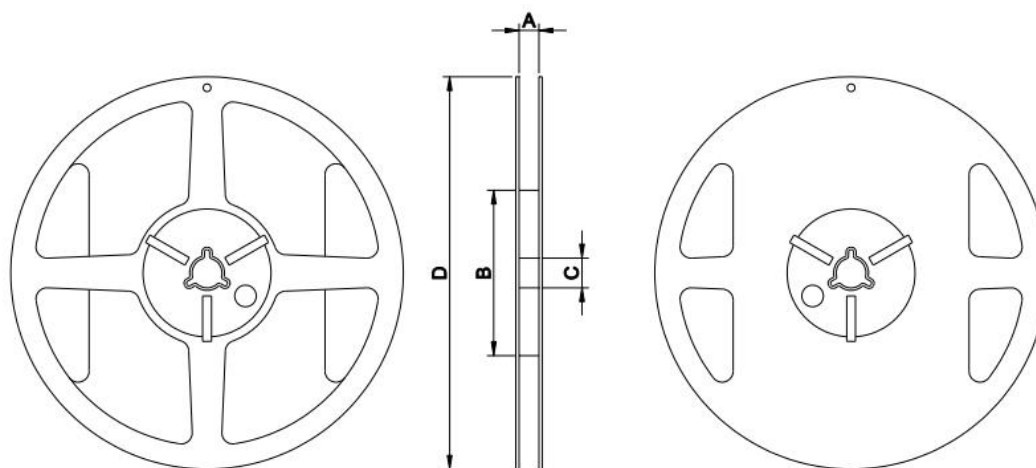
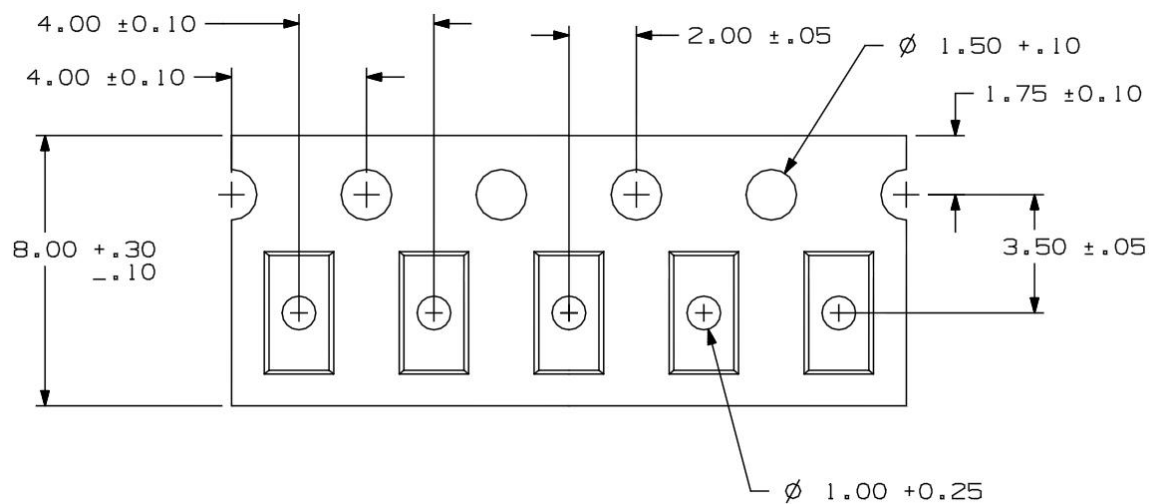


Table 5. Packaging and Shipping

Device	Packaging	Reel	Shipping
MAN2450L52	SMD	7"	3000/Reel

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com

MAN2450L52

2.4 GHz Chip Antenna



Revision	Description	Date
Rev0	Preliminary	2025/6/20

All Use For RF & Microwave

Shenzhen Megsine technology co., ltd www.megsine.com sales@megsine.com